


# Thru Axle Fit Guide

This product is NOT compatible with capped drop outs.

This guide is intended to help determine which Thru Axle you will need for hitching a Burley trailer to your bike.


## STEP 1

Print this sheet at 100% on 8.5" X 11" paper.

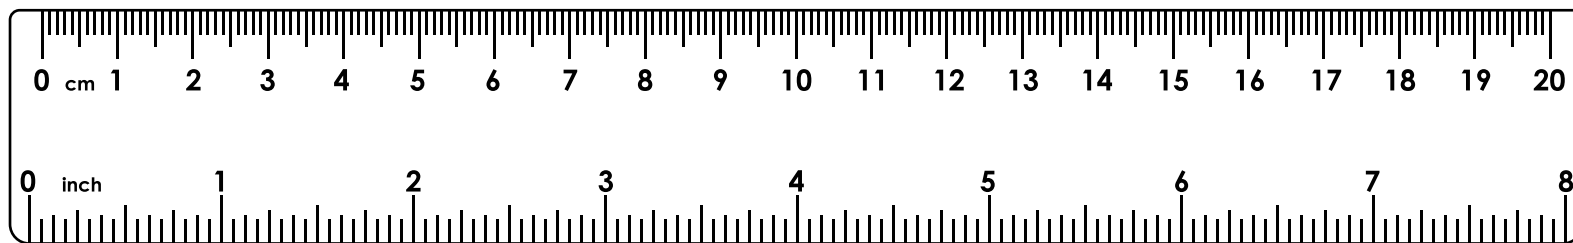


## STEP 2

Confirm the thread pitch of your current axle by placing it over the illustrations below to find a match. The thread pitch is the distance from the tip of one thread to the tip of the next.

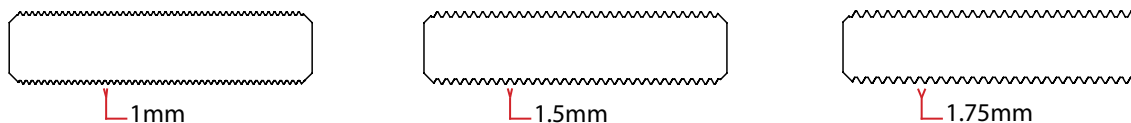

## STEP 3

Measure the length of your current thru axle using this illustration. Align your axle at 0mm, measure from the base of the axle head to the tip of the threads.

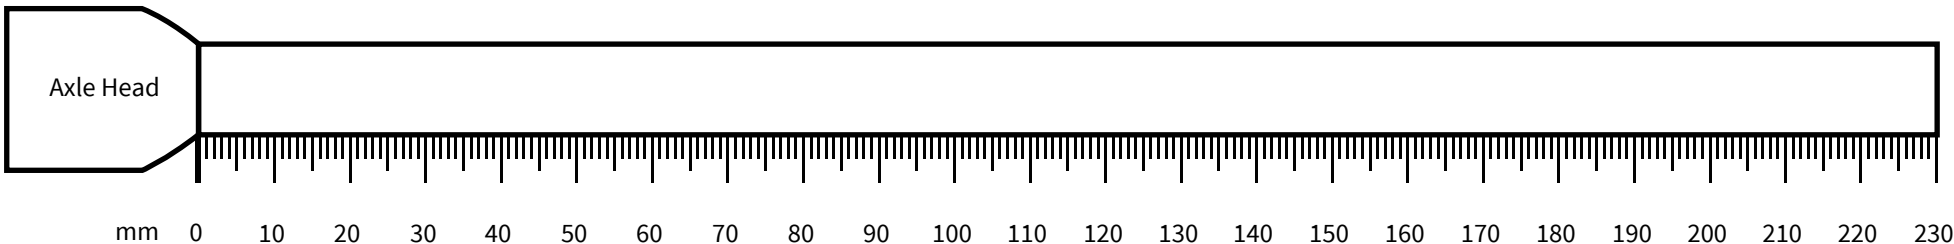

## STEP 4

Use the thread pitch and axle length to determine which axle you need.

Thread Pitch (TP)	Frame Measured Axle Length	Compatible Thru Axle	SKU
1.0	~158-174mm	12 X 1.0, 158-174mm actual length	960240
1.0	~167-183mm	12 X 1.0, 167-183mm actual length	960241
1.5	~159-165mm	12 X 1.5, 159-165mm actual length	960242
1.5	~172-178mm	12 X 1.5, 172-178mm actual length	960243
1.5	~229mm	12 X 1.5, 229mm actual length	960244
1.75	~174-180mm	12 X 1.75, 174-180mm actual length	960245
1.75	~229mm	12 X 1.75, 229mm actual length	960246

**NOTE:** If your axle length is not shown for the thread pitch you have, we do not have a compatible thru axle for you at this time.

BURLEY.COM

